

## Guiding and controlling

Tempofor C-assortment is ideal to guide public. Hot dip galvanised fences are durable and stable, guaranteeing a high level of safety. They are easily and quickly mounted.

Tempofor T has been designed especially for safely guiding traffic.

## Tempofor® C & T Assortment

### Tempofor C1

- basic panel with wire infill
- guiding and supporting rail at the top

### Tempofor C2

- crowd barrier
- strong frame with vertical bar infill (19 bars)
- anti-lift connection system

### Tempofor C2 Medium

- C2, but with lighter tubes

### Tempofor C3

- high safety crowd barrier, police barrier
- extremely stable due to steel platform
- hinge system for efficient transport and storage
  - quick and simple installation
  - strong frame with vertical bar infill

### Tempofor C3 Medium

- C3, but with lighter tubes

### Tempofor C4


- heavy duty stage barrier
- for crowd control in front of stages
  - foldable

### Tempofor Mobile crowd guidance system

- for effective entry control to events

### Tempofor T2

- fence for traffic guidance
- fitted with 2 reflecting signalisation strips
- stong wire infill

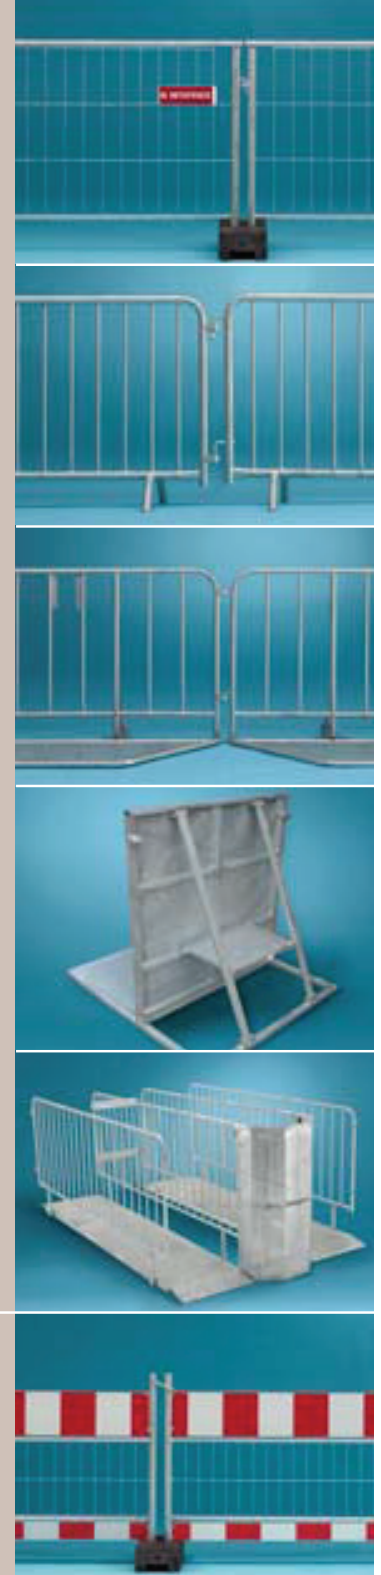

## Technical information

Type	Ref. n°	Description	Dimensions WxH mm	Mesh size WxH mm	Wire dia.		Tube dia.		Weight kg
					hor. mm	vert. mm	hor. mm	vert. mm	
C1	7014340	guiding panel	3454* X 1200	100x300	4	3,5	41.5x1,5	41.5x1,5	17,1
C2	7027934	crowd barrier	2460 x 1100	-	tube dia. 16		38.5x1.5	38.5x1.5	27,0
C2 MEDIUM	7034147	light crowd barrier	2460 x 1100	-	tube dia. 13		25,0x1,8	25,0x1,8	14,8
C3	7030969	police barrier	2088 x 1100	-	tube dia. 20		33,7x2,6	33,7x2,6	45,0
C3 MEDIUM	7034331	light police barrier	2110 x 1100	-	-		33,7x2,6	33,7x2,6	36,5
C4	7034707	stage barrier	1090 x 1250	-	-		-	-	70,0
T2	7024648	traffic control barrier	2096 x 1030	72,5x250	4,3	4,3	25,0x1,5	42,4x1,5	25,5

\* distance between centre of bases = 3500mm